



vivaldigroup.it

# ZEN SERIES

sound & light



# THE CONCEPT


---

Providing sound reinforcement to outdoor environments is not an easy task.

An outdoor speakers must operate and resist to all weather conditions, deliver a proper sound pressure level, quality and diffusion, yet keeping a pleasant design to match look and functionality expectation in any environment.

At Vivaldi we concentrated our efforts in designing and developing a whole series of premium speaker solutions that integrate top level Italian audio technology in a professional grade 316 stainless steel and aluminum enclosure with a premium brushed finish.

This was just the beginning. We also incorporated LED light modules for a better integration in open spaces where light is required. Zen speaker series.

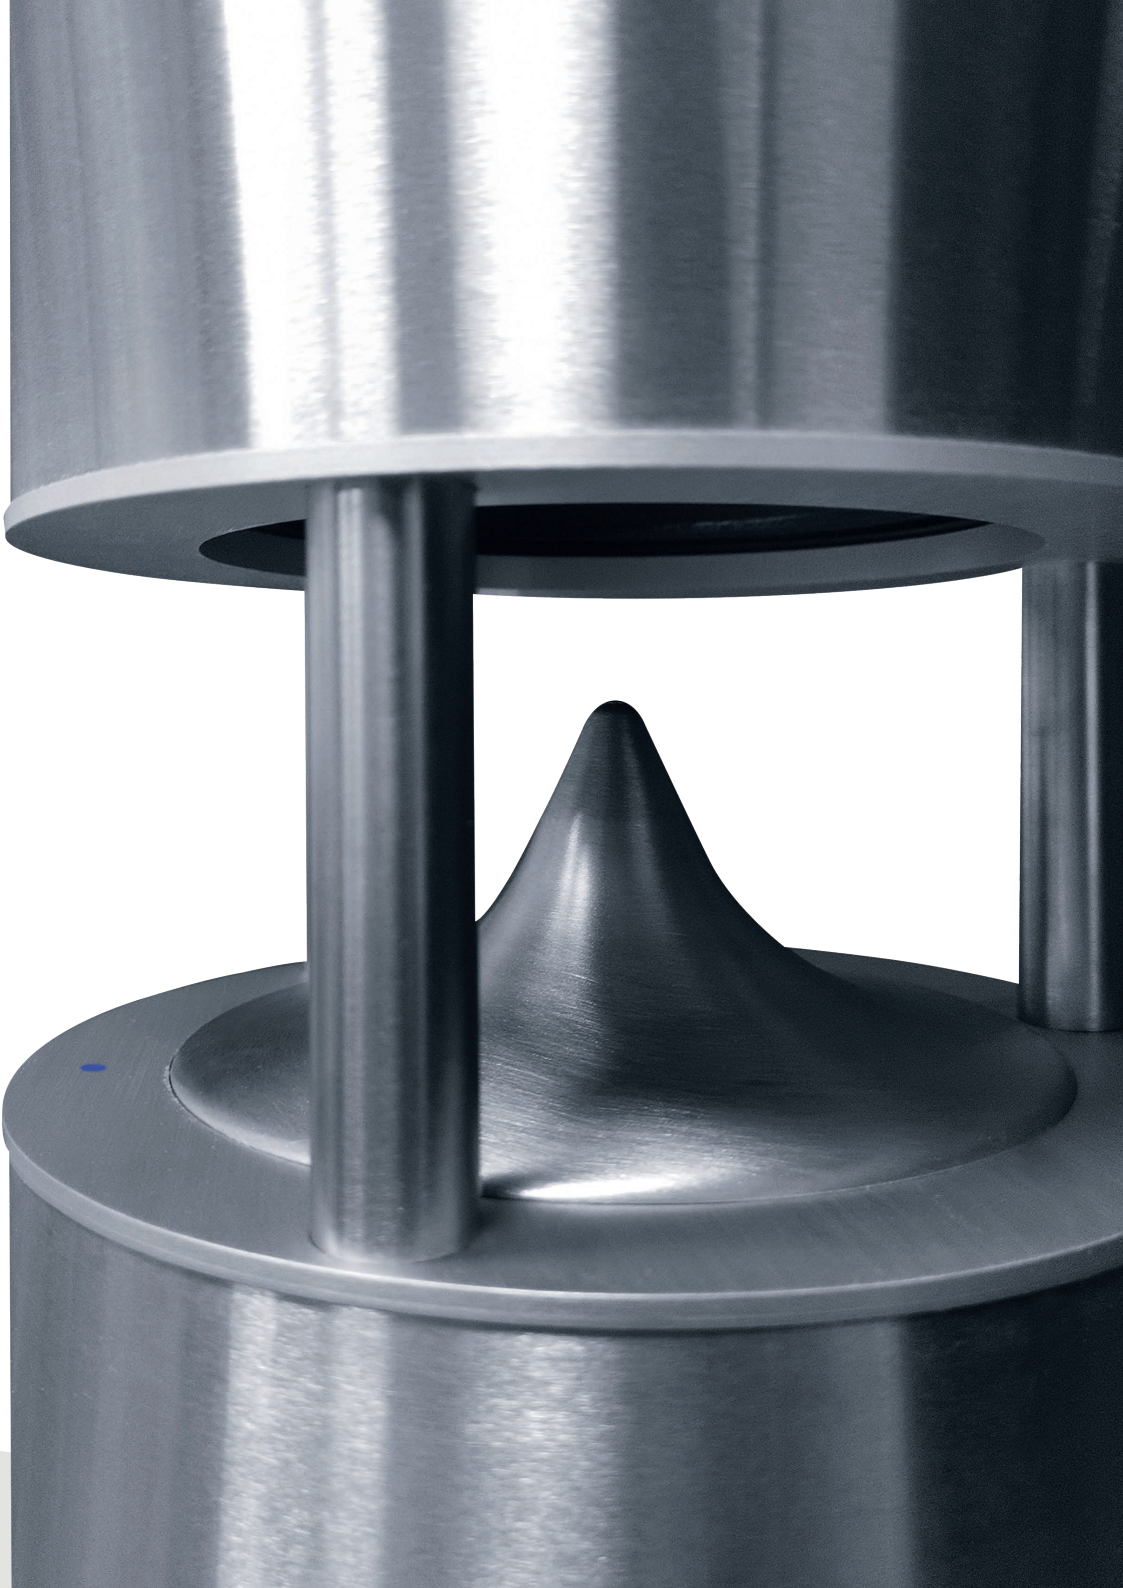




# THE MODELS

All Zen speakers feature a premium, water resistant coaxial design loudspeaker with a compression driver to improve efficiency at high frequencies. The top model also includes a dual push-pull subwoofer on the bottom of the cabinet for an impressive sound impact. Wow effect is guaranteed.

All models are available in combination with an LED light module, and in 8Ohm or 100V, active or passive version.

Every single speaker is assembled, sealed and tested by hand by our specialized team to provide a long lasting sound experience.

Zen speakers are 100% Made in Italy.

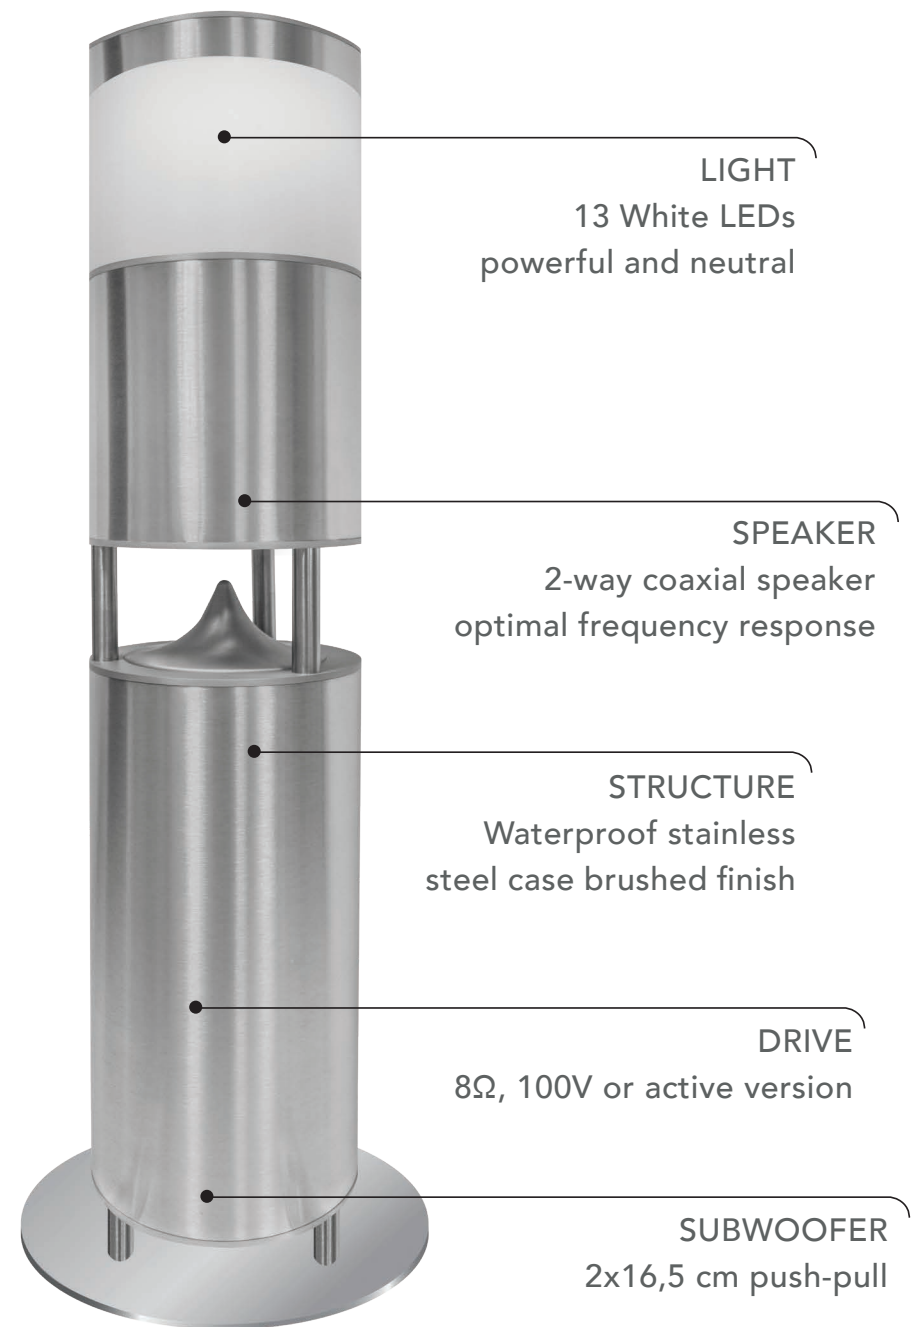

# ZEN315

# ZEN510

Power (RMS): 50W

Dimensions (DxH): 205x315 mm  
205x510 mm

Available versions: 8 $\Omega$  (ZEN315, ZEN510)  
100V (ZEN315T, ZEN510T)



ZEN315



ZEN510

# ZEN730

# ZEN930

Power (RMS): 100W

Coaxial speaker

Dimensions (DxH): 205x738 mm  
205x938 mm

Available versions: 8 $\Omega$  (ZEN730, ZEN930)  
100V (ZEN730T, ZEN930T)



ZEN730



ZEN930

# ZEN780

# ZEN980

Power (RMS): 300W

Coaxial speaker

Dimensions (DxH): 205x970 mm  
205x988 mm

Available versions: 8 $\Omega$  (ZEN780, ZEN980)  
100V (ZEN780T, ZEN980T)



ZEN780



ZEN980

ZEN315L 

ZEN730L 

Coaxial speaker

LED module: 66 LED

Brightness: 1380lm 4259K

LED color: white

RGB LED: available on demand

Dimensions (DxH): 205x315 mm  
205x730 mm



ZEN315L



ZEN730L

# SPECIFICATIONS



Model	ZEN315	ZEN730	ZEN780
Speaker type	high design speaker, HI-FI, 2-way, stainless steel, IP65 for outdoor use		high design speaker, HI-FI, 3-way, stainless steel, IP65, with built in subwoofer, for outdoor use
Subwoofer	-----	-----	2x16,5 cm push-pull
Woofers	16 cm	16 cm	16,5 cm
Tweeter	2,5 cm	2,5 cm	2,5 cm
Power (RMS)	50W a 8Ω, 16/32W a 100V	50W a 8Ω, 16/32W a 100V	300W
Power (program)	100W a 8Ω, 64W a 100V	100W a 8Ω, 64W a 100V	600W
Impedance	8Ω /100V	8Ω /100V	4Ω
Frequency range	70 - 20000 Hz	70 - 20000 Hz	45 - 20000 Hz
Sensitivity	89dB	89dB	92dB
Dimensions (mm)	205x315 (DxH)	205x738 (DxH)	205x788 (DxH)
Colour	acciaio spazzolato	acciaio spazzolato	acciaio spazzolato
Protection grade	IP65	IP65	IP65
RAL	on demand	on demand	on demand



# SPECIFICATIONS




Model	ZEN510AL	ZEN930AL	ZEN980ASL
Speaker type	high design speaker, HI-FI, 2-way, stainless steel, IP65, with built in LED light, for outdoor use.		high design speaker, HI-FI, 3-way, stainless steel, IP65, with built in LED ight and subwoofer, for outdoor use.
LED	66 LED -13,8W 1380 Lm -4250K	66 LED -13,8W 1380 Lm -4250K	66 LED -13,8W 1380 Lm -4250K
Subwoofer	-----	-----	2x16,5 cm push-pull
Woofer	16 cm	16 cm	16,5 cm
Tweeter	2,5 cm	2,5 cm	2,5 cm
Power (RMS)	50W a 8Ω, 16/32W a 100V	50W a 8Ω, 16/32W a 100V	300W
Power (program)	100W a 8Ω, 64W a 100V	100W a 8Ω, 64W a 100V	600W
Impedance	8Ω /100V	8Ω /100V	4Ω
Frequency range	70 - 20000 Hz	70 - 20000 Hz	45 - 20000 Hz
Sensitivity	89dB	89dB	92dB
Dimensions (mm)	205x315 (DxH)	205x788 (DxH)	205x788 (DxH)
Colour	brushed steel	brushed steel	brushed steel
Protection grade	IP65	IP65	IP65
RAL	custom colour on demand	custom colour on demand	custom colour on demand

# SPECIFICATIONS




Model	ZEN315L	ZEN730L
Speaker type	high design with LED light for outdoor use	
Technology	LED	LED
LED spots	66	66
Power (lamp)	13,8	13,8
Brightness	1380lm	1380lm
Temperature	4250K	4250K
Power Supply	240Vac	240Vac
Dispersion	360°	360°
Dimensions (mm)	205 x 315 (DxH)	205 x 730 (DxH)
Colour	opal white	opal white
Protection grade	IP65	IP65
RAL	customisable colour upon request	customisable colour upon request

# APPLICATIONS

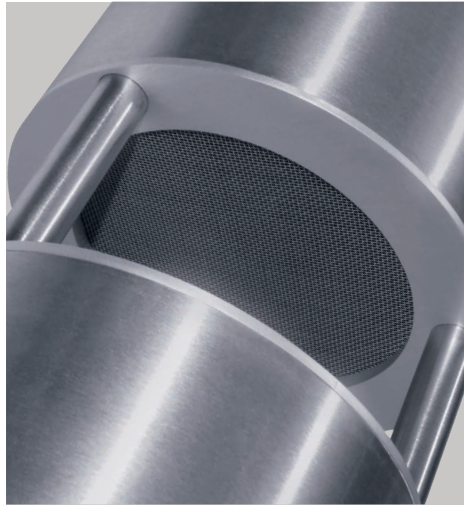



# APPLICATIONS

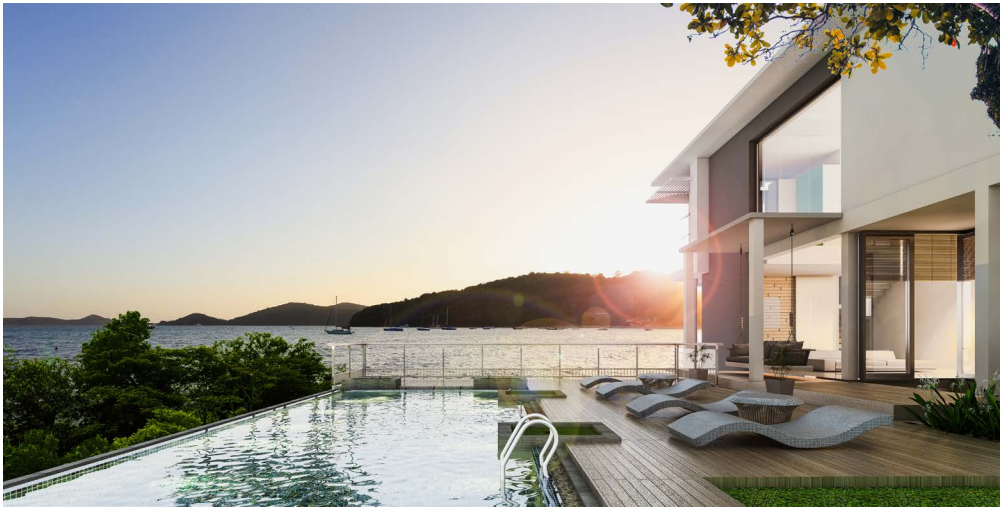



vivaldigroup.it

